


LED Screen HD WALL SERIES

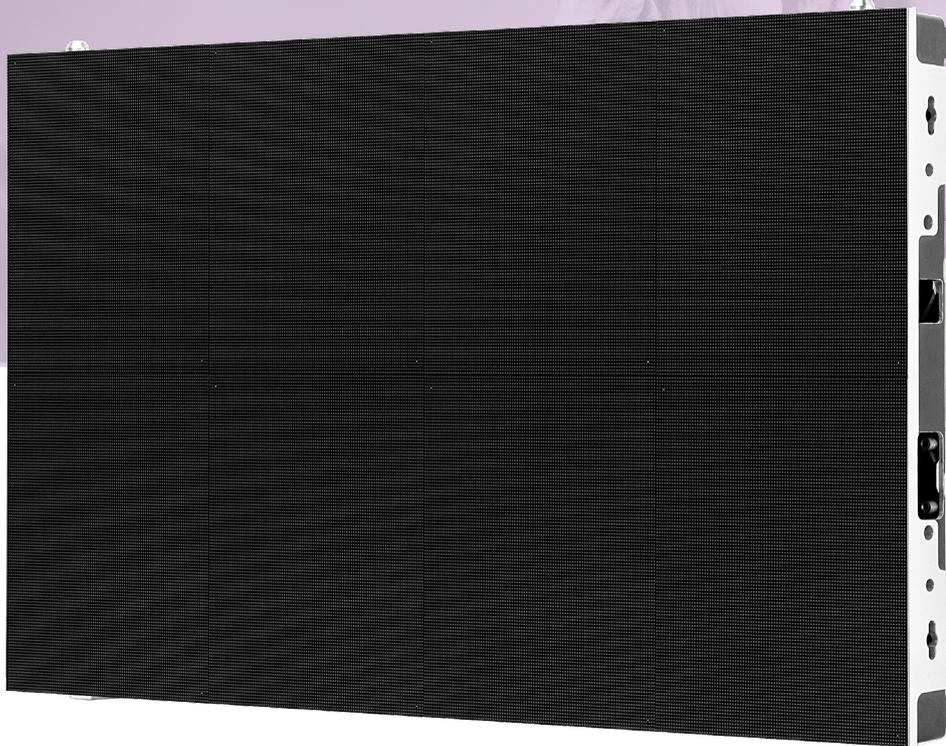

ARECH

Your Trusted Manufacturer Partner

2F BLG1, Xintaiyang Industrial Park, NO. 114
Zhulongtian Road, Shiyan Street, Baoan District,
Shenzhen, China

- +86 755 29191985
- +86 755 29191985
- overseas@arechtech.com
- <https://arechtech.com>
- <https://arechtech-led-display.eu>






LED Screen Fixed Outdoor SERIES

High Definition LED Video Screen

ARECH HD Wall LED Screen, can be a massive screen stretching edge to edge on a wall, displaying a spectacular panoramic view, using for the television industry (and much more).

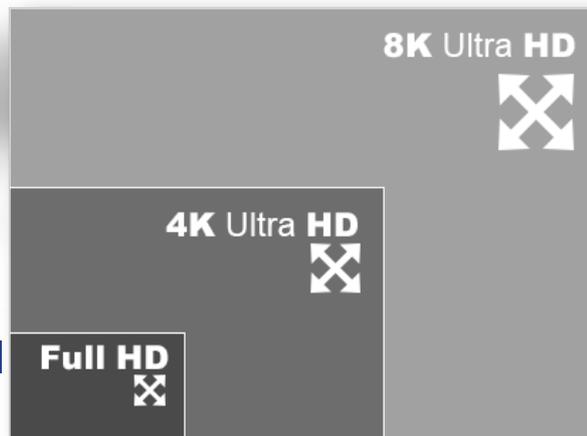

Resolution make the difference!

Front maintenance!



All parts front accessible



Fast and easy to take out the module/power supply



Essential Care service package up to 2 years



Other advantage point



Friendly adjustable brightness



Seamless splicing, high precision



Light-weight, 4.5kg/panel

Our Wall LED Screens support 3840hz high refresh rate, if you have High definition image demand on the Conference, control room, hotel, home, meeting room, airport, show room etc., Wall LED Screen is the best choice ever.

Size and quality really does matter!

The Aspect ratio on ARECH HD Wall LED Screen to support a 16:9 ratio is typically seen as optimal because it is capable of the highest resolution. It is also easy to capture this aspect ratio on almost all devices.




HD

High definition Wall LED Display

HD Wall LED Screen Specification

ACIDP02.5FF	ACIDP00.9TV	ACIDP01.2TV	ACIDP01.5TV	ACIDP01.8TV
Pixel Pitch	0.9mm	1.2mm	1.5mm	1.8mm
LED Type	MINI LED	SMD1010	SMD1010	SMD1010
Module Dimension WxH	150×168.75mm			
Cabinet Dimension WxH	600×337.5mm			
Cabinet Material	Aluminum			
Cabinet Weight	4.5kg/cabinet			
Service Type	Front			
Brightness	600-800nits	600-800nits	800-1000nits	800-1000nits
Processing	16 bit			
Colors	281 trillion			
Drive Mode	Dynamic			
Hor. Viewing Angle	160° +/-5° (@50% brightness)			
Vert. Viewing Angle	160° +/-5° (@50% brightness)			
Power Consumption	280 W/m ² (typ.)			
Refresh Rate	Adjustable			
IP Rating	IP30			
Operating Power Voltage	100-240V / 50-60Hz			
Operating Temperature	-10°C to +40°C			
Operating Humidity	10% to 90%			
Standard	CE / FCC			
Warranty	2 years			

We assure the quality, that's why we do quantity!



Your Trusted Manufacturer Partner

2F BLG1, Xintaiyang Industrial Park, NO. 114
Zhulongtian Road, Shiyan Street, Baoan District,
Shenzhen, China

-  +86 755 29191985
-  +86 755 29191985
-  overseas@arechtech.com
-  <https://arechtech.com>
- <https://arechtech-led-display.eu>

